

Pg-S330 Series Diesel Generator Set

 Standby
 Prime

 330 kVA
 297 kVA

 264 kW
 237 kW

Shangai Series



Engine 4

In Progen Generator engine products; High performance, low fuel consumption, mechanical or electronic governor depending on the type, Oil, air, fuel filters are interchangeable, using high technology engine brands in accordance with ISO 3046, ISO 8528, BS 5514, DIN 6271 standards.

ENGINE SPECIFICATIONS

Shangai premium		
SC9H272		
264 kW		
1500 d/dk		
6		
6		
12,88 lt		
135x150		
17:01		
Mechanical / Electronical		
Turbocharge + Intercooler		
Direct		
Water Cooling		
32 lt		
46 lt		
52 lt		
39 lt		
27 lt		

Alternator

In Progen Generator alternator products, it has a steel body design, robust structure, maintenance-free bearing system (brushless) with self-excitation system, electronic type voltage regulator, BS 4999-5000; CEI EN 60034-1; IEC 60034-1; VDE 0530, OVE M10, NF 51-100, 111; It uses high technology alternator brands in accordance with NEMA MG 1.22.

Λ	-67	$I \wedge T$	OD.	EEA	RES
- A	= '4'	7 A W B	W/ N		 V4 = 0 1

Power Factor	0,8
Insulation Class	Н
Protection	IP21-IP23
Output Voltage	231/400 VAC - 50 Hz
Frequancy	50 Hz
Connection Type	Star
Design	4 Poles - Brushless





Shangai Series

Control System

Easy-to-use secure software updates in Progen Generator control panels have a structure that can be easily done with USB ports. Optionally, remote control can be provided with ETHERNET and GPRS. Panel body is made of steel sheet and is painted with electrostatic powder paint. It has been painted. The electronics are isolated and waterproof design.

CONTROL SYSTEM FEATURES

LCD Screen Automatic Control System

Remote monitoring possibility

Multifunctional business opportunity

Multi language support


Programmable over USB, RS-232 and GSM



Chassis, Canopy and Fuel Tank

Progen Generator chassis has a modular design and is made of steel. Engine alternator Radiator connections are made with vibration wedges and vibration is minimized. Special chassis and fuel tank in line with customer demands can make designs.

CANOPY
Canopy design that facilitates generator maintenance
Emergency stop button on the cabin
Transparent control cabinet window
Acoustic sponge providing sound insulation
Hidden exhaust silencer inside the cabin
Engine cooling air ducts
Electrostatic powder paint resistant to corrosion and rusting
Refueling outside the cabin

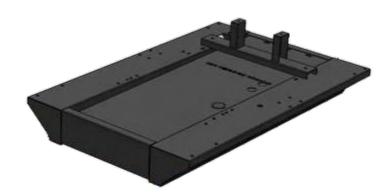

OPTIONS					
Transfer Board	Analog Gauges				
Protection Switch	24 Hour Fuel Tank				
External Type Fuel Tank	Special Chassis Color				
Synchronous System	Special Cabinet Color				
Electronic Governor Application	Remote Monitoring Module				
Earthquake Sensor	Special Type Mufler				

Quality Standards

- All generating sets produced by Progen Generator have TSE, CE and ISO 9001 certificates.
- Technical information and values are in accordance with ISO8528, ISO3046, 600341, standards.

TECHNICAL DIMENSIONS

CABINET GROUP							
WIDTH	LENGTH	HEIGHT	WEIGHT	FUEL TANK			
1200 mm	3500 mm	1950 mm	2140 kg	300 lt			
UNCABINET GROUP							
WIDTH	LENGTH	HEIGHT	WEIGHT	FUEL TANK			
1200 mm	3000 mm	1750 mm	1750 kg	300 lt			

